


**3mm
LED CBI® Circuit Board Indicator
.200" High LED Centerline**

Dialight
551-xx07

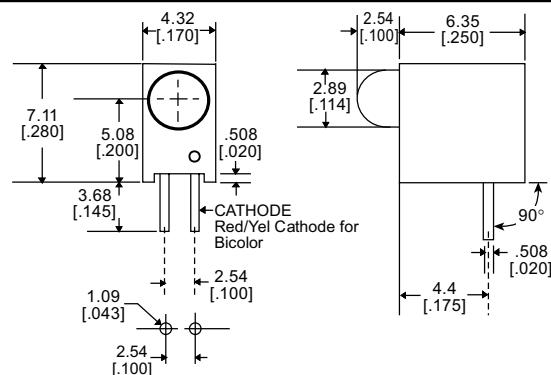

RECOMMENDED P.C. BOARD LAYOUT

Dimensions in mm [inches]

*Red/Yel Cathode for Bi-color

Standard Polarity shown in drawing: Cathode right

Benefits

- Quad block (551-xx07-004) available for reduced insertions
- Available with a variety of LEDs
- Housing material UL94V-0 rated
- Black housing enhances contrast
- High reliability - life measured in years
- Vibration and shock resistant
- Housing assures proper LED alignment
- Standoffs on housing facilitate PC board cleaning

LED Data

- For absolute maximum ratings and other electrical/optical data, refer to LED data sheet.

PART NO.

HIGH EFFICIENCY

551-0207	Green
551-0307	Yellow
551-0407	Red
551-2507	Orange

INTEGRAL RESISTOR, 5V

551-0507	Red
551-0607	Green
551-0707	Yellow

LOW CURRENT

551-1107	Red
551-1207	Yellow
551-1307	Green

BI-COLOR

551-3007	Red/Green
551-3107	Yellow/Green

To order any of the 551-xx07 part numbers with Reverse Polarity (Cathode Left), please add -010 to the part numbers shown above.

NEW

PART NUMBER ORDERING CODE

5 5 1 - x x 0 7 - 0 1 0

Series LED Type Reverse Polarity Option
1) Cathode Left

-010 Ordering Code Suffix required ONLY for Reverse Polarity Option

Typical Operating Characteristics ($T_A=25^\circ C$)*See LED data sheet for additional information***HIGH EFFICIENCY**

Part Number	Color	Peak Wavelength nm	I_V mcd	V_F Volts	Test Current (mA)	Viewing Angle $2\Theta_{1/2}$	LED Data sheet	Page #
551-0207	Green	563	16	2.1	10	45°	521-9408	4-63
551-0307	Yellow	585	6.3	2.1	10	45°	521-9428	4-63
551-0407	Red	650	10	2	10	45°	521-9427	4-63
551-2507	Orange	600	6.5	2.2	10	60°	521-9498	4-53

INTEGRAL RESISTOR, 5V

Part Number	Color	Peak Wavelength nm	I_V mcd	Test Voltage	Forward Current (mA)	Viewing Angle $2\Theta_{1/2}$	LED Data sheet	Page #
551-0507	Red	635	4	5	10	60°	521-9215	4-54
551-0607	Green	565	8	5	12	60°	521-9323	4-54
551-0707	Yellow	583	8	5	10	60°	521-9322	4-54

LOW CURRENT

Part Number	Color	Peak Wavelength nm	I_V mcd	V_F Volts	Test Current (mA)	Viewing Angle $2\Theta_{1/2}$	LED Data sheet	Page #
551-1107	Red	635	1.8	1.8	2	50°	521-9324	4-55
551-1207	Yellow	583	1.6	1.9	2	50°	521-9325	4-55
551-1307	Green	565	1.6	1.8	2	50°	521-9326	4-55

BI-COLOR*Bicolor data shown as red/green or yellow/green*

Part Number	Color	Peak Wavelength nm	I_V mcd	V_F Volts	Test Current (mA)	Viewing Angle $2\Theta_{1/2}$	LED Data sheet	Page #
551-3007	Red/Green	635/565	5	2	10	50°	521-9459	4-58
551-3107	Yellow/Green	585/565	4.3/6.3	2.1*/2.1*	10	80°	521-9478	4-57

* $I_F = 20mA$