
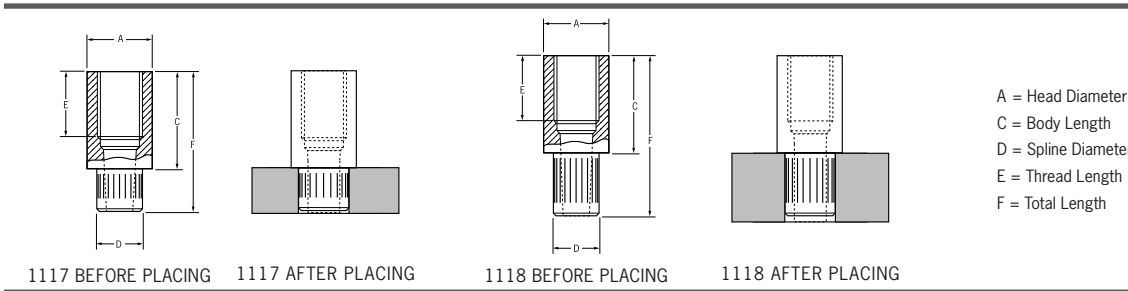


1117 - Brass, Max Board Thickness 2.0mm

1118 - Brass, Max Board Thickness 2.4mm

Material	Finish
Brass to BS EN 12166 CW 606N DIN 17660 Cu Zn37 Pb2	Tin plated

Dimensions and Performance Data - Avsert® 1117

Thread Size	Board Thickness		Hole Size		Part Number	Fasteners per pod*	A		C		D		E	F	Max Torque-to-Turn kN
	min.	max.	min.	max.			min.	max.	min.	max.	min.	max.			
M2.5 x 0.45	0.8	2.0	2.70	2.80	01117-06555	36			5.4	5.6			3.4	8.2	0.96
					01117-06560	34			5.9	6.1			3.9	8.7	
					01117-06570	30	3.9	4.0	6.9	7.1	2.59	2.69	4.9	9.7	
					01117-06580	27			7.9	8.1			5.9	10.7	
					01117-06590	25			8.9	9.1			5.9	11.7	
M3 x 0.5	0.8	2.0	3.30	3.40	01117-07055	36			5.4	5.6			3.4	8.2	1.52
					01117-07060	34			5.9	6.1			3.9	8.7	
					01117-07070	30	4.7	4.8	6.9	7.1	3.17	3.28	4.9	9.7	
					01117-07080	27			7.9	8.1			5.9	10.7	
					01117-07090	25			8.9	9.1			5.9	11.7	

Dimensions in millimetres

*Nominal value only. Tolerance ±1 fastener per pod.

Dimensions and Performance Data - Avsert® 1118

Thread Size	Board Thickness		Hole Size		Part Number	Fasteners per pod*	A		C		D		E	F	Max Torque-to-Turn kN
	min.	max.	min.	max.			min.	max.	min.	max.	min.	max.			
M2.5 x 0.45	0.8	2.4	2.70	2.80	01118-06555	30			5.4	5.6			3.4	9.5	0.96
					01118-06560	29			5.9	6.1			3.9	10.0	
					01118-06570	26	3.9	4.0	6.9	7.1	2.59	2.69	4.9	11.0	
					01118-06580	24			7.9	8.1			5.9	12.0	
					01118-06590	22			8.9	9.1			5.9	13.0	
M3 x 0.5	0.8	2.4	3.30	3.40	01118-07055	30			5.4	5.6			3.4	9.5	1.52
					01118-07060	29			5.9	6.1			3.9	10.0	
					01118-07070	26	4.7	4.8	6.9	7.1	3.17	3.28	4.9	11.0	
					01118-07080	24			7.9	8.1			5.9	12.0	
					01118-07090	22			8.9	9.1			5.9	13.0	

Dimensions in millimetres

*Nominal value only. Tolerance ±1 fastener per pod.

Textron Fastening Systems Limited

Mundells, Welwyn Garden City, Hertfordshire AL7 1EZ United Kingdom
Telephone +44 (0) 1707 668668 Facsimile +44 (0) 1707 338828
www.avdel.textron.com