

Small, chip LEDs


SML-310 Series

The SLM-310 series are small, chip LEDs. The compact and leadless design of these LEDs allows for high mounting density.

●Features

- 1) Four colors: red, orange, yellow and green.
- 2) Rectangular and leadless (1.6×0.8 mm, 0.8 mm thick)
- 3) Can be mounted by automatic mounting.

●External dimensions (Units : mm)

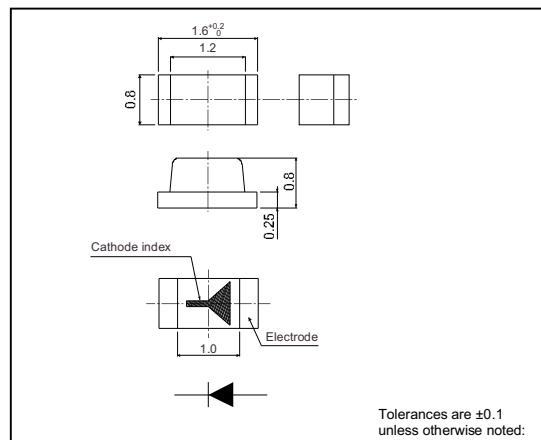

●Selection guide

Lens \ Emitting color	Red	Orange	Yellow	Green
Lens				
Transparent clear	SML-310JT	SML-310DT	SML-310YT	SML-310MT
	SML-310LT	-	-	SML-310PT
	SML-310VT	-	-	SML-310FT

●Absolute maximum ratings ($T_a=25^\circ\text{C}$)

Parameter	Symbol	Limits		Unit
		Bright red (L, J)	Other colors	
Power dissipation	P_D	60	55	mW
Forward current	I_F	25	20	mA
Peak forward current	I_{FP}	75	60	mA*
Reverse voltage	V_R	4		V
Operating temperature	T_{opr}	-30~+85		°C
Storage temperature	T_{stg}	-40~+85		°C

* Pulse width 1ms Duty 1 / 5

SML-310 Series

LED lamps

●Electrical and optical characteristics ($T_a=25^\circ C$)

Type	Parameter	Color	Forward voltage			Reverse current		Luminous intensity			Peak wavelength		Spectral line half width	
			V _F (V)		Cond.	I _R (μA)	Cond.	I _V (mcd)	Cond.	λ _P (nm)	Cond.	Δλ(nm)	Cond.	
			Typ.	Max.	I _F (mA)	Max.	V _R (V)	Min.	Typ.	I _F (mA)	Typ.	I _F (mA)	Typ.	
SML-310	JT	Red	1.9	2.5	20	100	4	14.0	40.0	20	660	20	25	20
	LT	Red	1.75	2.5	20	100	4	3.6	10.0	20	660	20	25	20
	VT	Red	2.0	2.8	20	100	4	1.4	4.0	20	650	20	40	20
	DT	Orange	2.0	2.8	20	100	4	2.2	6.3	20	610	20	40	20
	YT	Yellow	2.1	2.8	20	100	4	2.2	6.3	20	585	20	40	20
	MT	Green	2.2	2.8	20	100	4	3.6	16.0	20	570	20	40	20
	FT	Green	2.2	2.8	20	100	4	1.4	4.0	20	560	20	40	20
	PT	Green	2.2	2.8	20	100	4	1.4	4.0	20	555	20	40	20

●Directional pattern

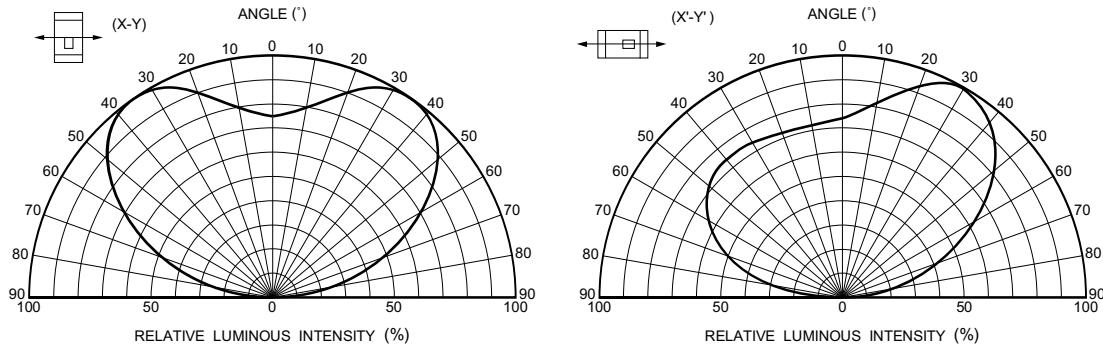


Fig. 1 Directional pattern

●Electrical characteristics curves 1 (SML-310LT, SML-310JT) (Bright red)

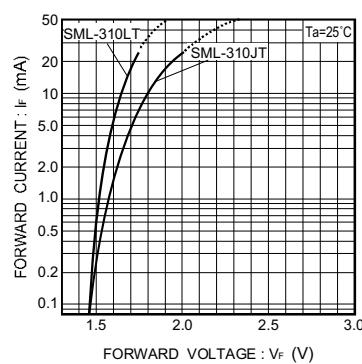


Fig. 2 Forward current vs. forward voltage

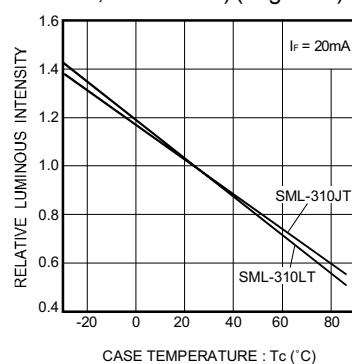


Fig. 3 Luminous intensity vs. case temperature

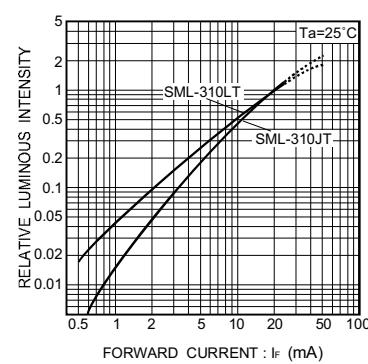


Fig. 4 Luminous intensity vs. forward current

SML-310 Series

LED lamps

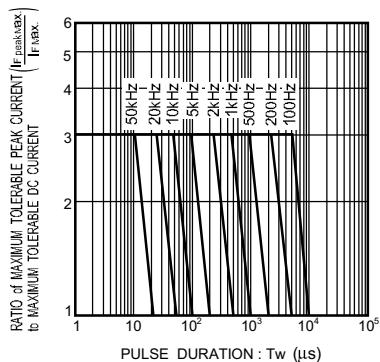


Fig. 5 Maximum tolerable peak current vs. pulse duration

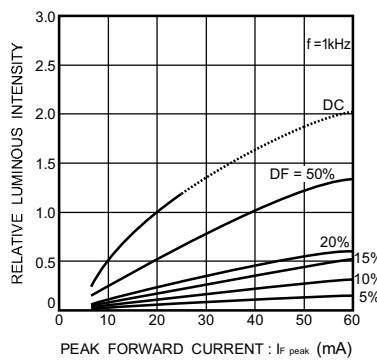


Fig. 6 Luminous intensity vs. peak forward current

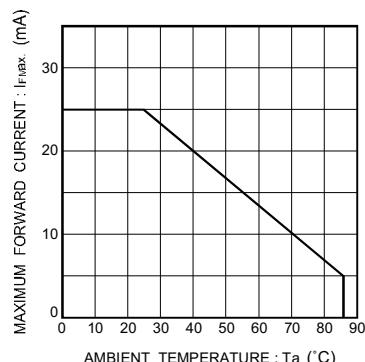


Fig. 7 Maximum forward current vs. ambient temperature

●Electrical characteristics curves 2 (SML-310VT) (red)

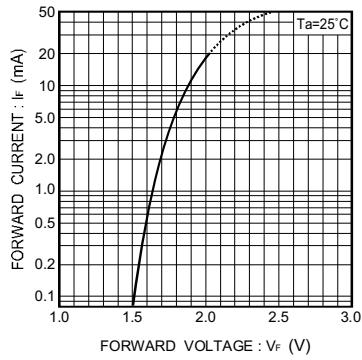


Fig. 8 Forward current vs. forward voltage

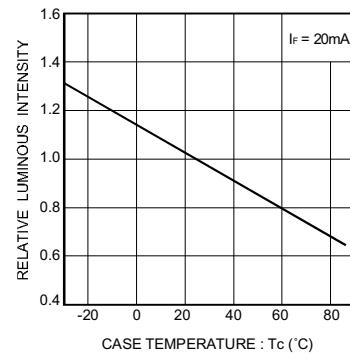


Fig. 9 Luminous intensity vs. case temperature

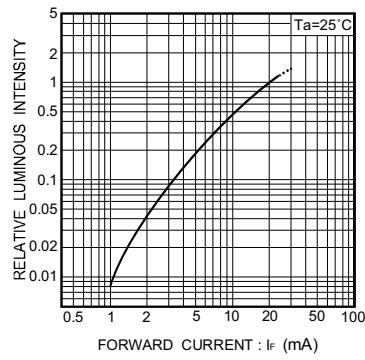


Fig. 10 Luminous intensity vs. forward current

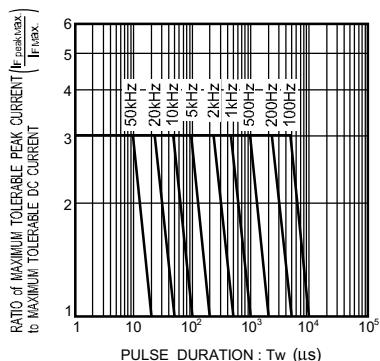


Fig. 11 Maximum tolerable peak current vs. pulse duration

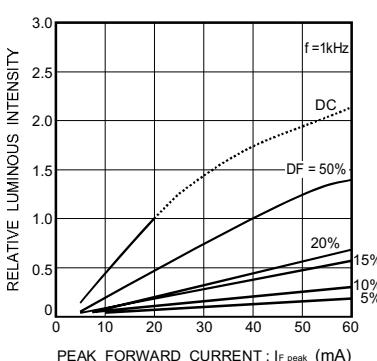


Fig. 12 Luminous intensity vs. peak forward current

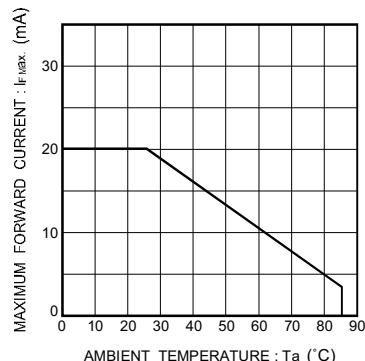


Fig. 13 Maximum forward current vs. ambient temperature

SML-310 Series

LED lamps

● Electrical characteristics curves 3 (SML-310DT) (orange)

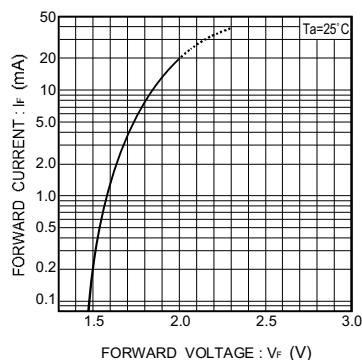


Fig. 14 Forward current vs.
forward voltage

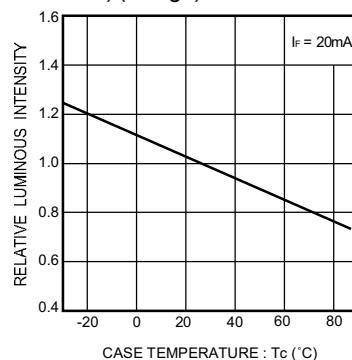


Fig. 15 Luminous intensity vs.
case temperature

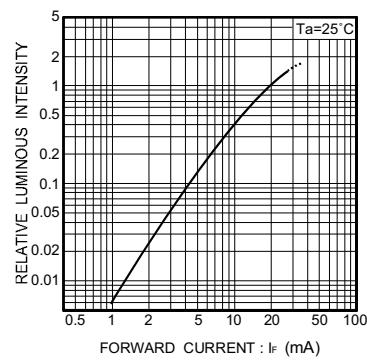


Fig. 16 Luminous intensity vs.
forward current

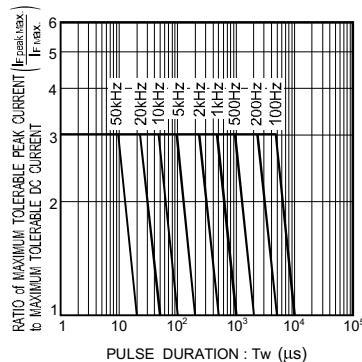


Fig. 17 Maximum tolerable peak current
vs. pulse duration

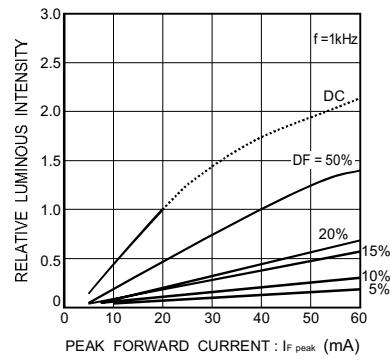


Fig. 18 Luminous intensity vs.
peak forward current

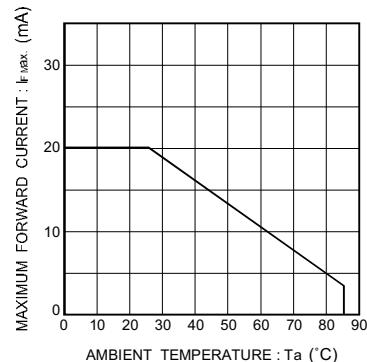


Fig. 19 Maximum forward current
vs. ambient temperature

● Electrical characteristics curves 4 (SML-310YT) (yellow)

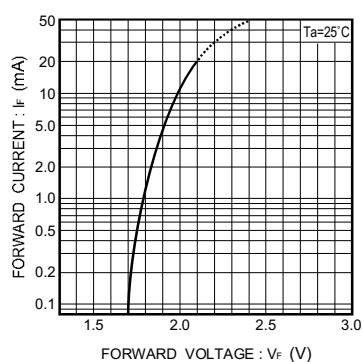


Fig. 20 Forward current vs.
forward voltage

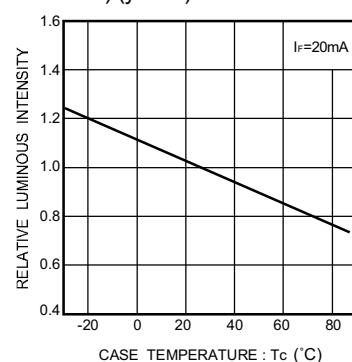


Fig. 21 Luminous intensity vs.
case temperature

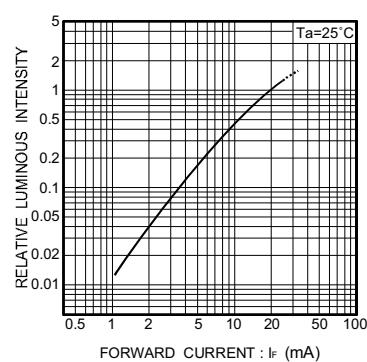


Fig. 22 Luminous intensity vs.
forward current

SML-310 Series

LED lamps

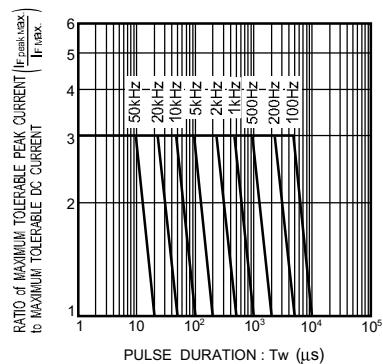


Fig. 23 Maximum tolerable peak current vs. pulse duration

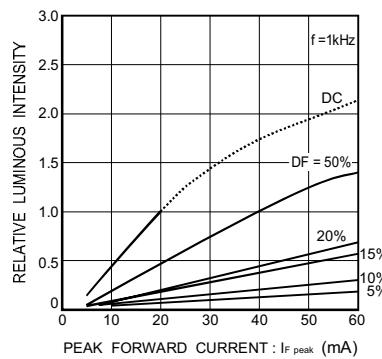


Fig. 24 Luminous intensity vs. peak forward current

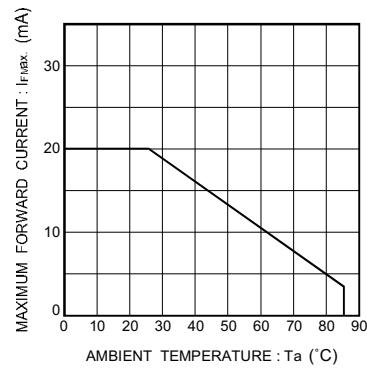


Fig. 25 Maximum forward current vs. ambient temperature

●Electrical characteristics curves 5 (SML-310MT, SML-310PT, SML-310FT) (green)

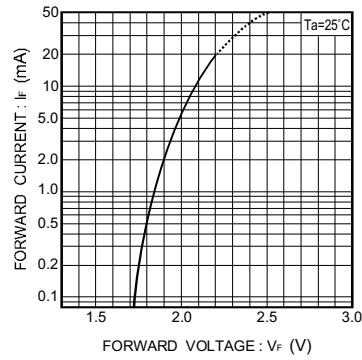


Fig. 26 Forward current vs. forward voltage

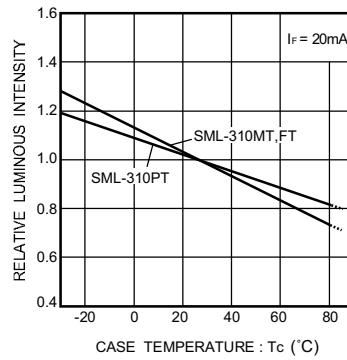


Fig. 27 Luminous intensity vs. case temperature

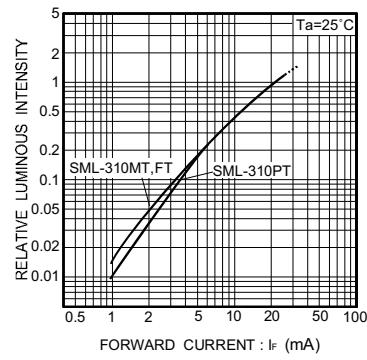


Fig. 28 Luminous intensity vs. forward current

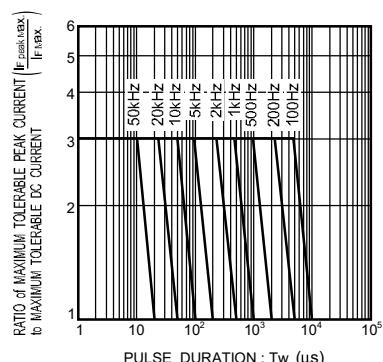


Fig. 29 Maximum tolerable peak current vs. pulse duration

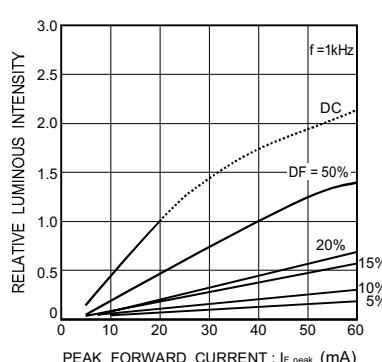


Fig. 30 Luminous intensity vs. peak forward current

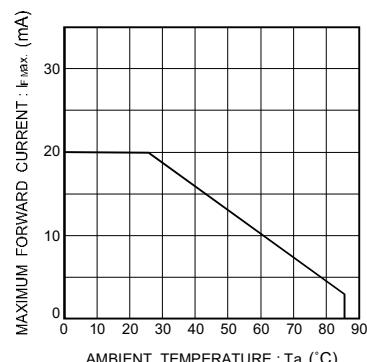


Fig. 31 Maximum forward current vs. ambient temperature